



# 25MHz standard Filter

## Part Number 025010

### Typical Performance

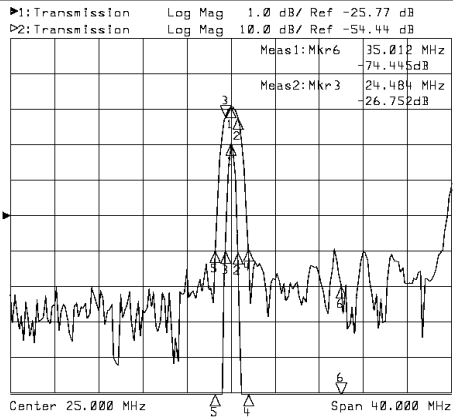

Horizontal: 4MHz/Div  
Vertical: 1dB/Div&10dB/Div


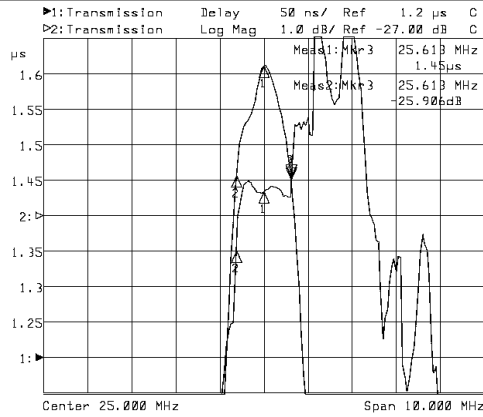


Horizontal: 1MHz/Div  
Vertical: 50nsec/Div&10dB/Div

### Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	24.90	25.00	25.10
Insertion Loss at $F_0$	dB		23.77	24.00
1 dB Bandwidth	MHz	0.70	0.71	
3 dB Bandwidth	MHz	1.17	1.18	
40dB Bandwidth	MHz		3.05	3.07
Passband Variation	dB		0.20	0.30
Group Delay Variation	nsec		100	120
Absolute Delay	usec		1.43	
Ultimate Rejection	dB	40	44	
Substrate Material	-		112-LiTaO3	
Ambient Temperature	°C	-40	25	85

### Package

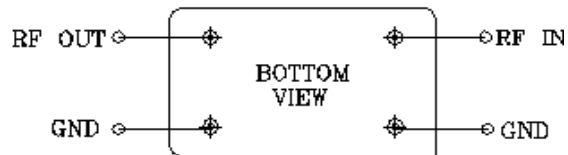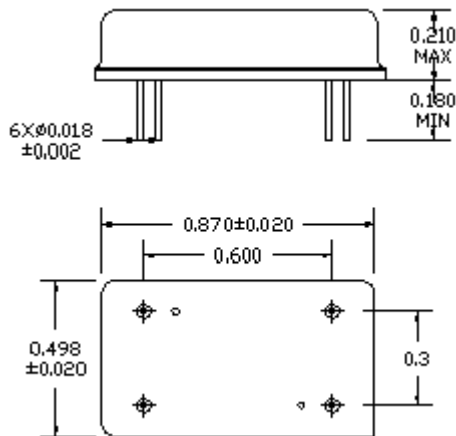

No Matching Required  
 Source/Load Impedance=50ohm  
 Package Style XI