


1. Part Number: 063058SMD

2. Electrical Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	62.90	63.00	63.10
Insertion Loss at F_0	dB		16.00	16.50
1 dB Bandwidth	MHz	5.40	5.50	
3 dB Bandwidth	MHz	5.80	5.95	
40dB Bandwidth	MHz		7.90	8.00
Pass band Variation	MHz		0.60	0.80
Group Delay Variation	nsec		50	70
Absolute Delay	usec		1.17	
Ultimate Rejection	dB	43	45	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80


3. Mechanical Package (mm)

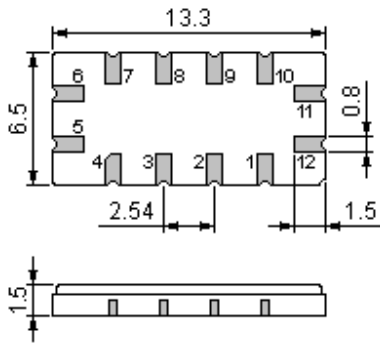


Pad Configuration

11	Input/ Output
5,6	Output/ Input
12	Ground
Other	Case ground

4. Plots

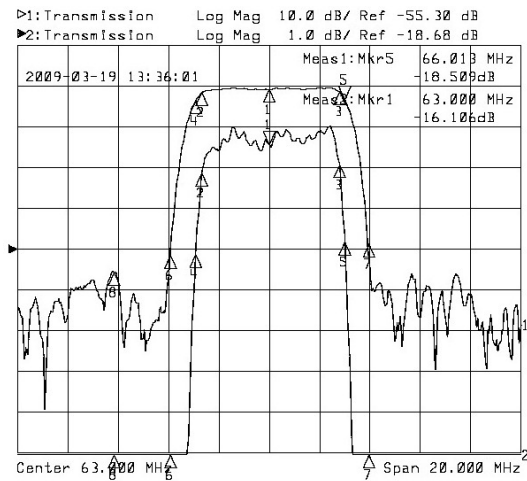

Horizontal: 2MHz/Div; Vertical: 0.5dB/Div & 10dB/Div

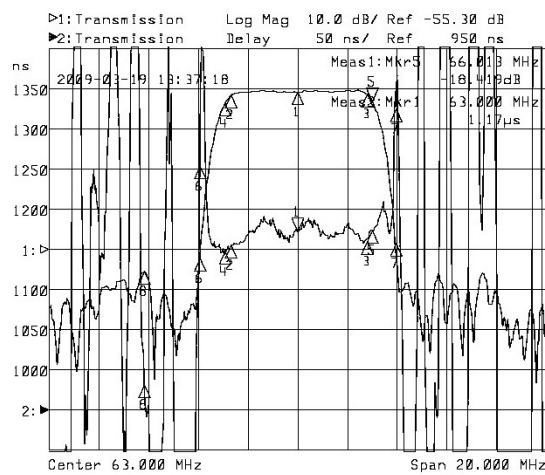

Horizontal: 2MHz/Div; Vertical: 50ns/Div & 10dB/Div