


74MHz Standard Filter


Part Number 074110

Typical Performance

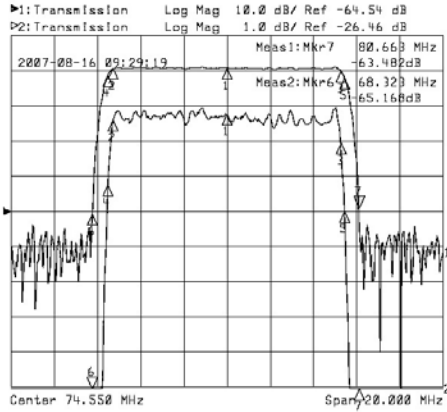

Horizontal: 2MHz/Div

Vertical: 1dB/Div&10dB/Div

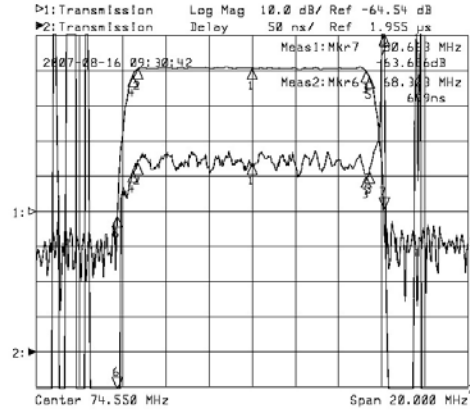



Horizontal: 2MHz/Div

Vertical: 50ns/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	74.40	74.55	74.70
Insertion Loss at F ₀	dB		23.70	25.00
1 dB Bandwidth	MHz	10.40	10.60	
3 dB Bandwidth	MHz	10.80	11.00	
40dB Bandwidth	MHz		12.30	12.50
Passband Variation	dB		0.50	0.80
Group Delay Variation	nsec		30	50
Absolute Delay	usec		2.22	
Ultimate Rejection	dB	40	45	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

Package

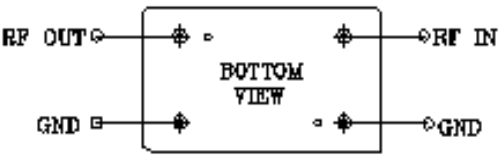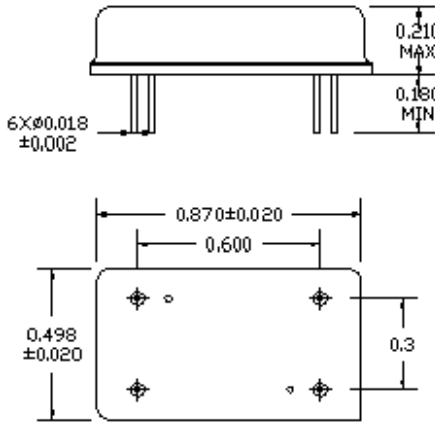

No Matching Required
Source/Load Impedance=50ohm
Package Style II