



115MHz Standard Filter

Part Number 115065

Typical Performance

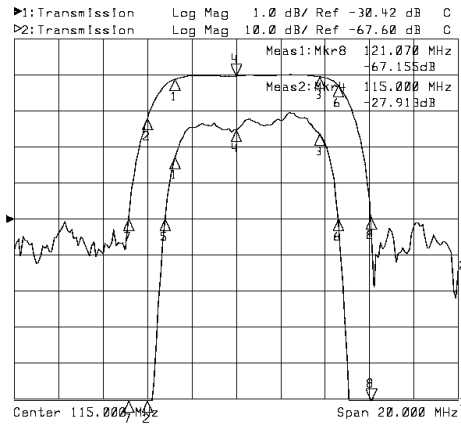



Horizontal: 2MHz/Div
Vertical: 1dB/Div&10dB/Div

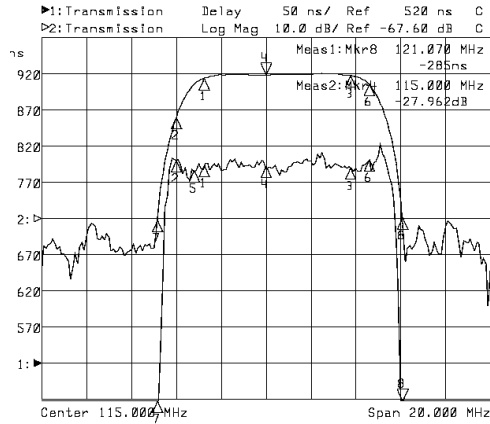

Horizontal: 2MHz/Div
Vertical: 50nsec/Div&10dB/Div

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	114.90	115.00	115.10
Insertion Loss	dB		24.00	24.85
112.25MHz	dB		-0.50	-1.00
118.75MHz	dB		-1.20	-1.80
111.00MHz	dB		-12.01	-15.04
Passband Variation	dB		0.80	1.10
Group Delay Variation	nsec		60	80
Absolute Delay	usec		0.71	0.72
Ultimate Rejection	dB	38	40	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C	-40	25	80

Package T0-5A

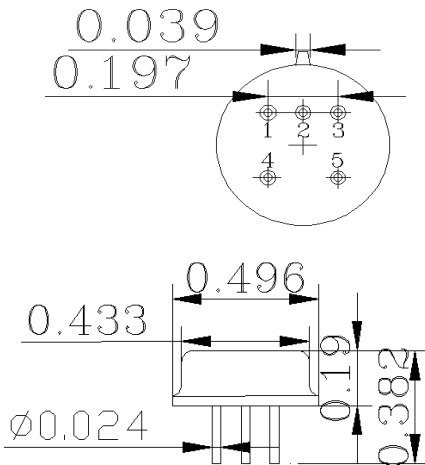

TO-5A IN: 1
 OUT: 5
 GND: 2,3,4