



120MHz Low-loss filter

Part Number 120020L

Typical Performance

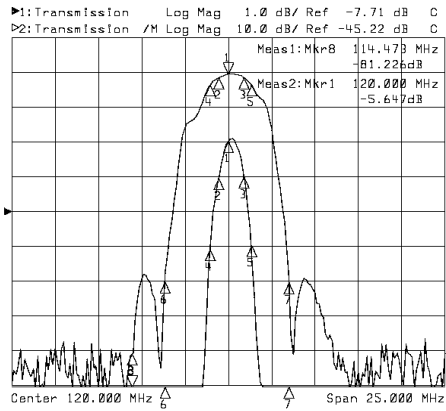

Horizontal: 2.5MHz/Div
Vertical: 1dB/Div&10dB/Div

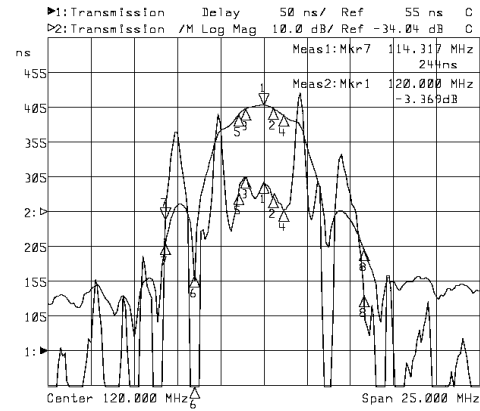



Horizontal: 2.5MHz/Div
Vertical: 50nsec/Div&10dB/Div

NOTE: Date shown is based on two 120020-cascaded configurations

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	119.90	120.00	120.10
Insertion Loss at F ₀	dB		5.80	6.02
1 dB Bandwidth	MHz	1.43	1.47	
3 dB Bandwidth	MHz	2.32	2.36	
60dB Bandwidth	MHz		7.18	7.24
Passband Variation	dB		0.20	0.30
Group Delay Variation	nsec		100	140
Absolute Delay	usec		0.60	0.62
Ultimate Rejection	dB	76	80	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

Package SB-7

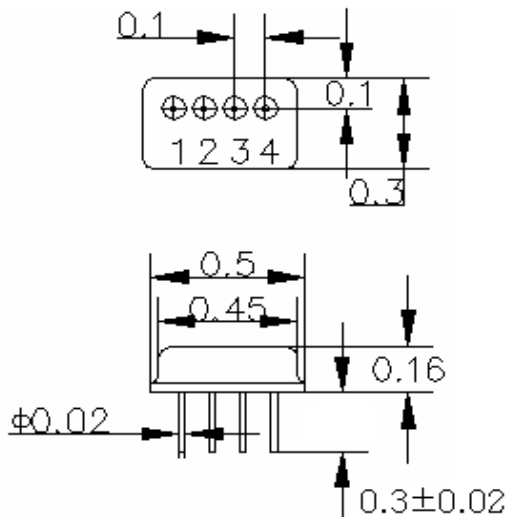

SB-7 Input(Output): 1
Output(Input): 4
Input(Output) ground: 3
Chip carrier-ground: 2